



**ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.**

**Factory site:** 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

2020 VERSION 1/COPYRIGHT 2020/09

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



## A Series High Range Stand-on Pallet Stacker With Mast Move

with capacities of 1,200 to 2,000kg

*The World of Hangcha*




# LET THE LITHIUM POWER TAKE OVER



## INNOVATIVE SOLUTIONS NEW POWER NOW

Innovative, reliable lithium-ion technology (Lithium Iron-Phosphate), which are developed jointly by HANGCHA and CATL. Battery cells and modules are from CATL, with reliable quality, exclusively for HANGCHA.

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature, ensuring normal operation in low temperatures.
- / Quick charging: 2 hours full charge, economic use of each break.
- / Long-working: 4000 charging cycles, capacity retention greater than 80%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

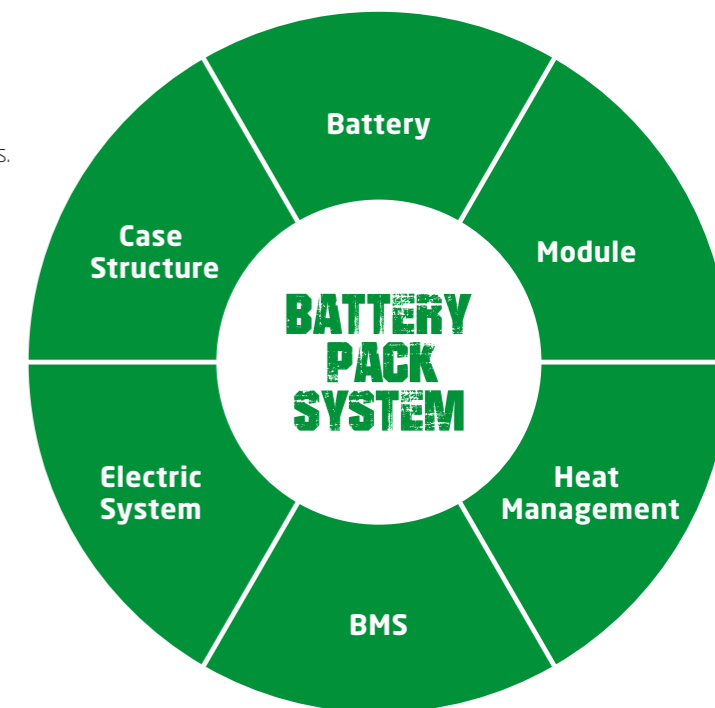

Li-Ion  
2 hours  
100%

Lead-acid batteries  
8-10 hours 100%

**Rapid charging and opportunity charging ensure continuous availability of vehicles.**

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging (100 % charge in 2 hours). They are maintenance free and do not require a battery change when used for multi-shift operations.

### Li-Ion Battery Pack specification

Type		CQDB12-AC1S-I	CQDB16-AC1S-I	CQDB20-AC1S-I
Li-Ion battery	V/Ah	24/120	24/120	24/120
Li-Ion battery,Optional	V/Ah	24/202	24/202	24/202
Titans charger		SPC-24100	SPC-24100	SPC-24100



HANGCHA provides Li-Ion battery (LiFePO4) with 5 years or 10000 hours warranty.



# A Series High Range Stand-on Pallet Stacker With Mast Move

The truck combines benefits of regular stacker and counterbalanced stacker. It can be used for non-standard pallets, enclosed pallets, and enclosed shelves. The mast can be retracted into truck body, which reduces passage width required for operation significantly, and the stacker is an ideal vehicle for operation in narrow passage. Cutting-edge AC control technology applied for the truck offers excellent performance, comfortable operation, safety and reliability, and low maintenance cost.

**Easy/  
Efficiency/  
Economy**



## High Performance

- / EPS(Electric Power Steering) is standard specification, which provides flexible operation.
- / Pump motor realize proportional control all operation of fork by the controller, thus more accurate fork operation.
- / The AC driving motor features excellent acceleration performance, outstanding climbing ability, low heat emission, and is brushless, and maintenance-free.
- / The latest CURTIS AC / ZAPI AC control system realizes accurate, stable, and efficient control.
- / Regenerative brake of the truck prevents it from sliding on a slope.
- / Switches, plug connectors, meters, and other important parts are all imported from abroad, with excellent performance and reliable quality.
- / Standard featured fork tilting and load backrest realize safer loading and unloading of goods.
- / The hydraulic power unit features low noise, small vibration, and stable and reliable lifting and lowering.



Fork tilt F/R: 3° / 5°

## Reliability

- / Three-pivots and low-gravity-center design and the high-strength steel plate framed structure feature large residual load capacity, and long service life.
- / All plug connectors are imported and waterproof, and all cables have reliable protection, which increases reliability of electrical system significantly.
- / Non-contact proximity switch features long service life and reliable operation.
- / The mast is made of H-shaped steel channels, which offer better rigidity and stability in comparison with C-shaped channels.
- / Reach track of mast is made of high-strength steel channels, with longer service life.
- / Power plug is fastened to truck body, which can avoid damage of plug due to impact when battery is lifted for installation.
- / Flexible connections of the battery can avoid disconnection fault of battery because of lasting vibration.



EPS (Electric Power Steering) is standard specification

## Maintenance

- / The brushless, maintenance-free AC driving motor reduces operation cost significantly.
- / The meter integrating battery indicator, timer, and fault self-diagnosis is convenient for maintenance.
- / Back cover can be opened fully, and all components and parts are clear at a glance, which is very convenient for maintenance of the entire machine.



BUCHER hydraulic unit



Multi-function tiller

## Safety

- / Traveling speed will be automatically reduced after fork lifting 500mm.
- / Turning speed is automatically reduced when steering.
- / The integrated stamping molded guardrail offers better protection for the operator.
- / Release braking, reverse braking and emergency braking can ensure safety of traveling.
- / Anti-sliding function on slope can ensure safety of operation.
- / The belly button on top of operating handle can avoid the driver from injury effectively.
- / The soft landing system reduces lowering speed automatically when height from ground to fork is less than 100mm, which provides effective protection for goods.

## Comfort

- / The vibration-reduction design of the pedal reduces fatigue of long-duration operation.
- / Operating tiller has beautiful appearance, and function buttons for comfortable operation.
- / The standard configuration of tortoise speed driving function allows the truck to move at slow speed more easily.
- / Optimized mast structure design offers excellent field of view for operations, which is easy for access and exit pallet.
- / The electronic limit system can reduce vibration and noise when mast move forward.

## Options

- / Mast height: 2000-4500mm for duplex mast, 3500-5500mm for triplex mast
- / Various fork lengths
- / Sideshift move LH/RH  $\pm 100$ mm

## Standard specification

- / AC driving motor
- / CURTIS AC / ZAPI AC controller
- / Controller for pump motor
- / EPS (Electric Power Steering) system
- / Automatic deceleration at turns
- / Proportional speed regulation for all fork operations
- / Pedal and guardrail
- / Emergency power off switch
- / Multi-function battery condition meter
- / Fork length 1070mm
- / Adjustable outer distance of forks within the range of 200-750mm
- / Fork tilt forward / backward: 3° / 5°
- / Load backrest
- / 2.7m duplex mast with double lifting cylinders
- / Soft landing system
- / Multi-function tiller
- / Traveling speed will be automatically reduced after fork lifting 500mm
- / Reach distance of fork: 590mm
- / Battery capacity: 280Ah for 1.2t model, 340Ah for 1.6/2.0t model
- / The electronic limitation to be acted when mast move forward

